




LIPI MARKETING PVT. LTD

Follow Us at
f @ G+ t v

KENJET

KG - UF 9060

Hi-Speed, Hi-Res UV Flatbed Printer

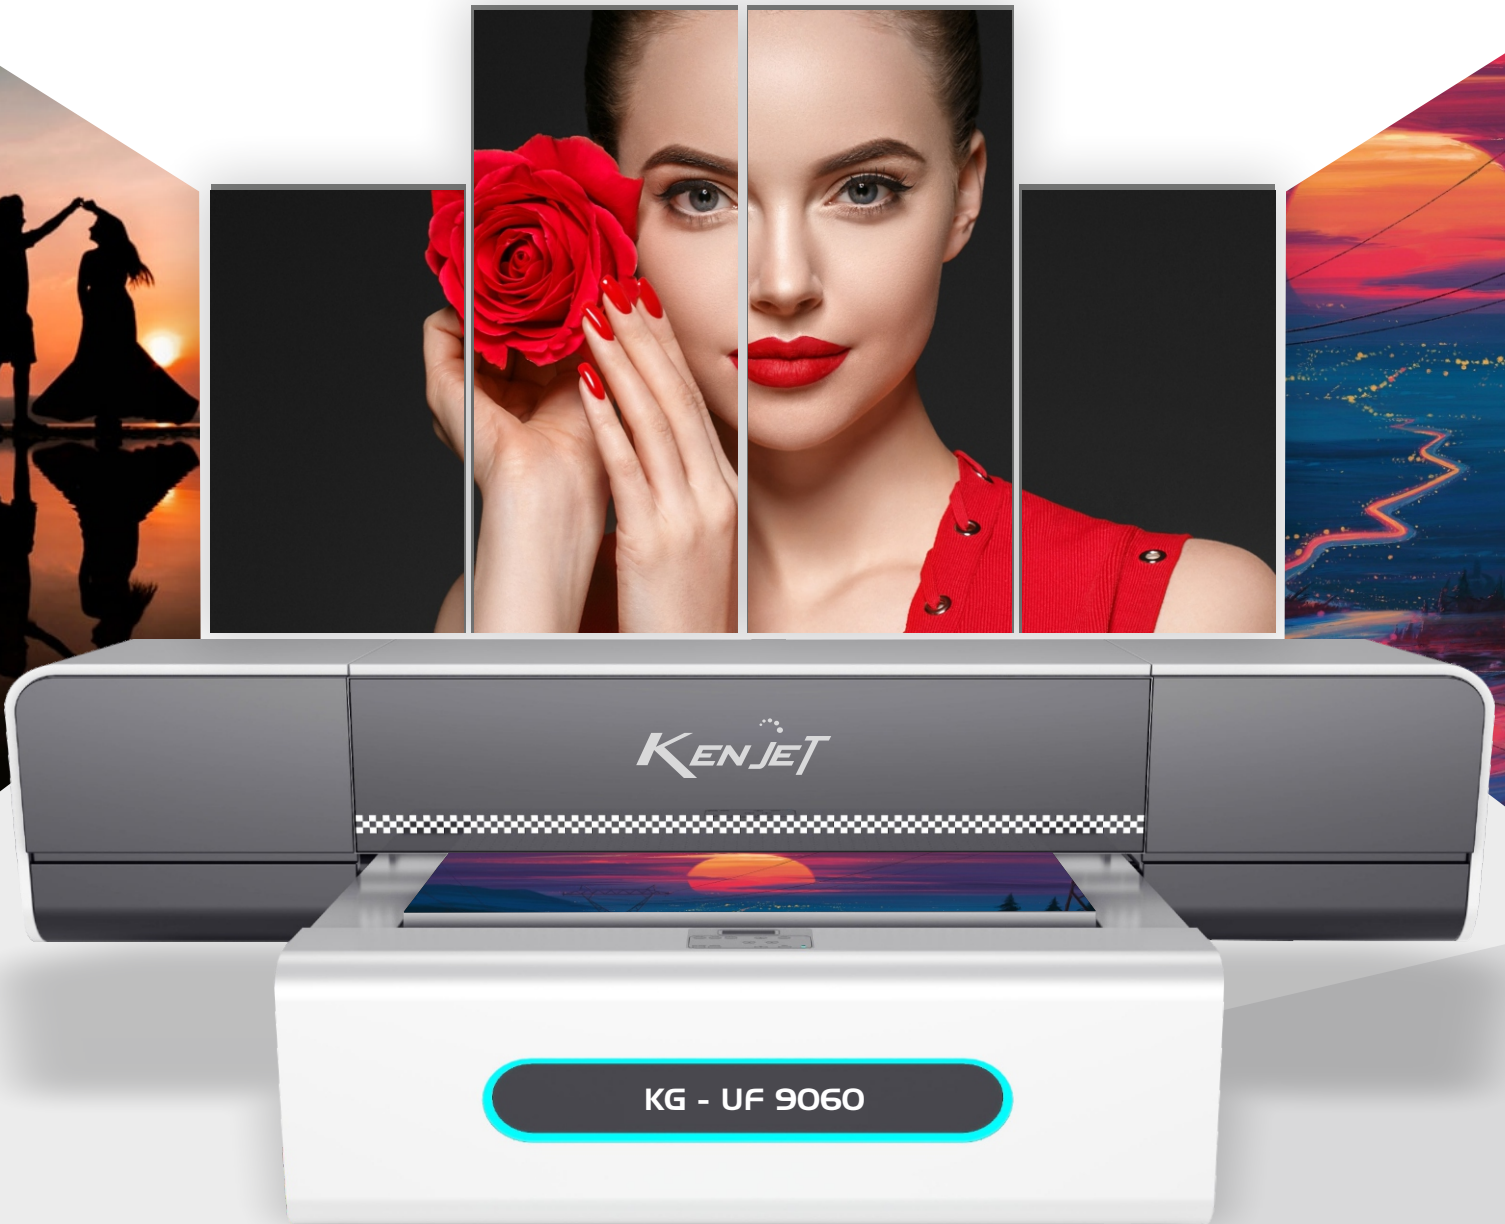
















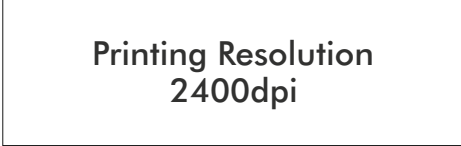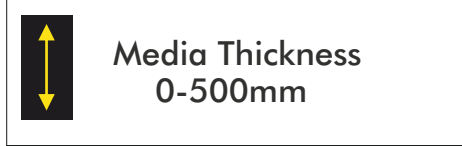


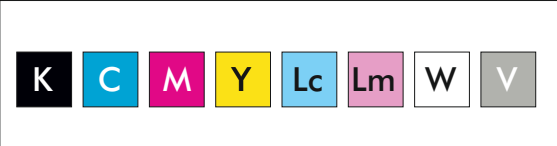
KG - UF 9060


Contact us:

+91 94443 95477 / +91 94443 95467

www.lipimarketing.com

Features

 Printing Format 900 x 600mm	 Printing Resolution 2400dpi	 Media Thickness 0-500mm		
 Industrial Equipment	 Epson Ricoh TOSHIBA	 LED - UV	 Constant Pressure for Ink	 Intelligent Software
 Integrated arc Hi-tecture	 Lead Screw drive	 High Precision Guide	 Printer heads Not easy to plug up	 The Sprinkler Heads are Misaligned
 Uninterrupted Ink Supply	 Variable Drops	 White Ink Circulation	 6 Colours	 Environmental Protection Ink
 K C M Y Lc Lm W V				

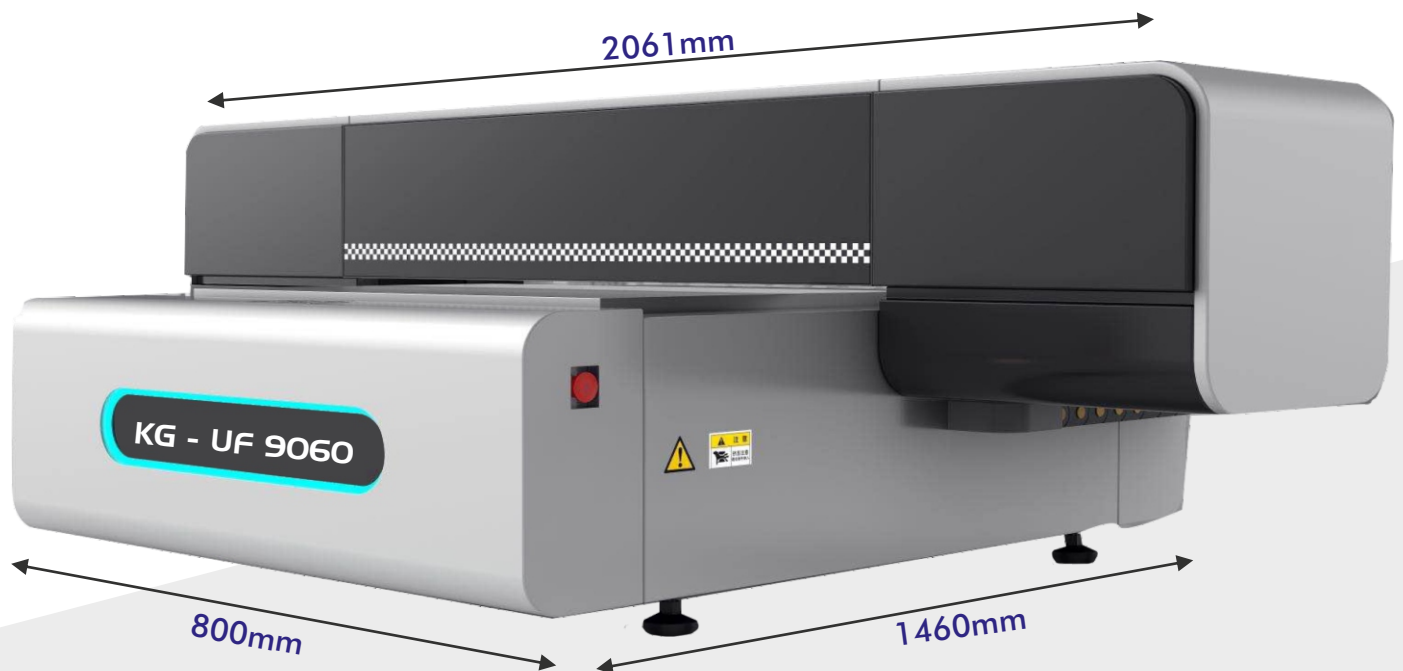

Media / Handling

- ▶ High-precision Vacuum table and ensure the High Resolution printing
- ▶ Media Type: Wood board, aluminum board, door plank, paper, PVC board, Ceiling, Glass, Ceram, Acrylic, Fabric, Gift boxes, Cup ,Bottle, etc...
- ▶ Maximum printable area: 900mm x 600mm
- ▶ Maximum Media Thickness: 20cm

Features

1. Three printheads array, white colours and Varnish Can be supported the same time printing

The standard configuration is 6 colour install 3 print heads. The white and Varnish for option.
Can be upgrade to be different configuration as users want

2. Printhead Anti-Crashfunction

Anti-crash function guarantees the carriage will stop in the case of print heads lower than substrates to
Protect print heads from Mis-operation or Inferior materials

3. Substrate thickness automatic detection, print head height adjustment

KG - UF 9060 supports printing over material as thick as 200mm. The system Thickness and adjusts
Print head height It improves production Automation and image output quality to a Large extent.

4. Auto rise-and-fall substrate locator system

GC9060UV supports automatic substrate location to guarantee printing precision on rigid board.

5. Double Y Drive & double Crew Rod

Double Y Drive motor & double TBI Crew Rod. Ensure the high resolution printing

6. White Ink Re-circulation system

KG - UF 9060 Series printer offers eight major utilizing white ink applications. White ink Re-circulation
Results in an effective elimination of ink starvation and protects print heads from clogging hazard.

7. XY LEISAI SERVER MOTOR

XY LEISAI MOTOR, industrial movement striction, transfer much smooth hand faster.
Make the high resolution printing.

8. THK Mute Guide

Integrate Mute Guide and Super strong Aluminum alloy beam, ensure the noiseless and stable printing

9. Air COOLING LED UV LAMP

High power, long lifetime, Adjustable, High-efficiency curing

10. Alarm for lack of Ink

The Alarm will help to supply ink to reservoir on time.

11. Cylindering Printing

The Cylindering assembly can be circumscribed and ensure the Cylindering goods printed stable .

12. Approved by EU and International StandardSystem

Conforming to ISO9001, 2008 international standard system. CE . FCC, ULCE and
RoHS certificates obtained.

Technical Parameter

Model	KG - UF 9060		
Printing Width	Panel 900mm (W) x 600mm (D)		
Printing Head	Xp600	i3200 Speed	
Colour Configuration	8 Colour (C + M + Y + K + Lc + Lm + W)		
Ink	Environmental Protective UV Ink		
Curing Mode	UV - LED Cold Light Source		
Printing Resolution	1200dpi; 1800dpi; 2400dpi		
Computer System	Win7/ Win10		
Transmission Interface	USB 2.0 / 3.0		
Platform	Hard adsorption platform		
Power Supply	AC-220V±10%,10A,50/60Hz		
Printing Speed	8 Pass	3sqm/hr	5sqm/hr
	4 Pass	4sqm/hr	8sqm/hr
	6 Pass	6sqm/hr	12sqm/hr
Machine Size	1960 x 1100 x 1100mm		
Packing Size	2300 x 1300 x 900mm		
Weight	≤200kg		
Auxiliary Function	Automatic height measurement, automatic anti-collision, automatic		
	electrostatic removal, lighting system		
Environmental	The The best temperature is 15-30°C, relative humidity is 30-70%		
	Clean, dust-free, no direct sunlight, well ventilated environment		

Application

Metal, Acrylic, Glass, Wood, Leather, Plastic, etc...



® LIPI MARKETING PVT. LTD

No: 28, 3rd Cross St, Venkateswara Colony, Nehru Nagar, Kottivakkam, Chennai - 600041

+9194443 95477 / +91 94443 95467

✉ sales@lipimarketing.com 🌐 www.lipimarketing.com