




LIPI MARKETING PVT. LTD.

Follow Us at  
f @ G+ t v

**KENJET**



**KB-UR 3200 F**

Double Rubber Roller UV Roll Printer

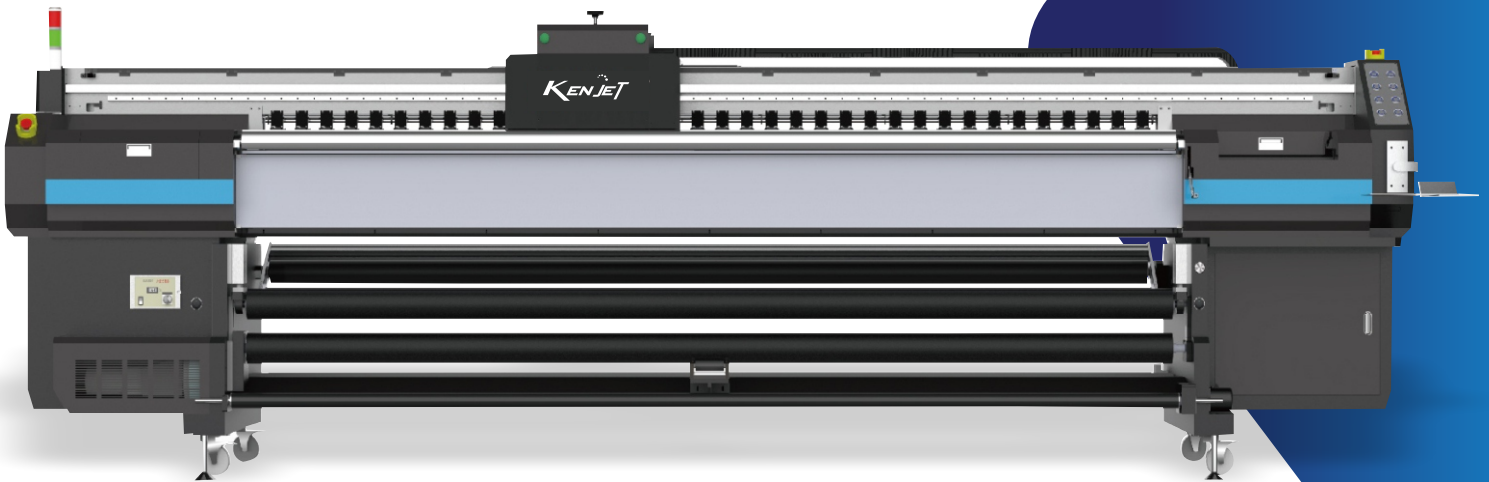


### Superior Performance


- The Main Power Supply of the Machine is Controlled Separately from the UV Lamp Power Supply to prevent excessive current load and effectively reduce electromagnetic interference. The German Schneider power switch is not easy to leak electricity and has long service life
- Pneumatic Double Rubber Rollers and Auxiliary constant force synchronous stepping system completely Solve the problem of in accurate stepping and size length of traditional felt rollers
- Adopting all imported components: THK Silent Guide Rail, Panasonic/ Fuji Motor, Megadyne silent synchronous belt, IGUS Silent
- Using advanced magnetic powder tension control system and sof film start tensioning device, Super soft materials can also print at high speed
- Professional Feeding System with automatic compression correction system to ensure That the Entire roll is printed without deviation
- Precise adjustment of negative pressure to ensure smooth printing in different environments
- Print Head Configuration Plan



## Accessory Details



Shaped Integrated



THK Guide Rail Imported from Japan



Intelligent anti collision device



Long-life LED Lamp




Panasonic / Fuji motor



Material Tensioning system



Double Rubber Roller Stepping System

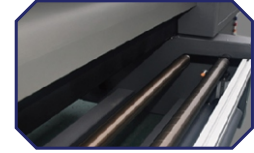

Feeding Constant Force Tension System


## Technical Parameter

Print Head	Konica 1024A			
Printing Resolution	600dpi to 3600dpi			
Color Mode	Four Color / White Optional			
Material Thicknesses	0-20mm			
Curing System	LED Light Curing / Pump Light Optional			
Print Size	Partition Suction Adapts to Various Materials			
Ink	Maximum width 3200mm			
Ink Tank Capacity	Environment Protection UV Ink			
Ink Supply System	200ml Volume Ink, Automatic ink Shortage alarm and Ink Supply			
Print Material	Light Cloth/ Car Sticker / Wallpaper / Light Film / Oil Canvas / Soft film, etc...			
Operating System	Windows7 64Bit RAM ≥ 8G			
Printing Speed	8psc Konic 1024A	Draft Mode	Production Mode	High Precision Mode
		90m <sup>2</sup> /h	70m <sup>2</sup> /h	46m <sup>2</sup> /h
	4psc Konic 1024A	Draft Mode	Production Mode	High Precision Mode
		45m <sup>2</sup> /h	35m <sup>2</sup> /h	23m <sup>2</sup> /h
RIP Software	Photoprint / PrintFactory / Onyx Optional			
Working Environment	Temperature: 15-30°C Humidity 40-80%RH			
Power Supply	Maximum Power: 6kW AC: 220V (±10%) >LSA, 50~60Hz			
File Format	TIFF, JPEG, EPS, PDF, PSD			
Dimensions	5660 x 1390 x 1690mm			
Total Weight	1350kg			


## Application



Soft film Ceiling

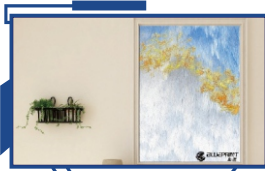

Oil Painting Decoration



Oil Painting Decoration



Background Wallpaper



LIPI MARKETING PVT. LTD

No: 28, 3rd Cross St, Venkateswara Colony, Nehru Nagar, OMR, Kottivakkam, Chennai - 600041

+9194443 95467 / +91 94443 95477 ✉ sales@lipimarketing.com 🌐 www.lipimarketing.com