




LIPI MARKETING PVT. LTD.

Follow Us at
f @ G+ t v

KENJET

INDUSTRIAL GRADE 3.2M UV HYBRID PRINTER

KB-UH 3200

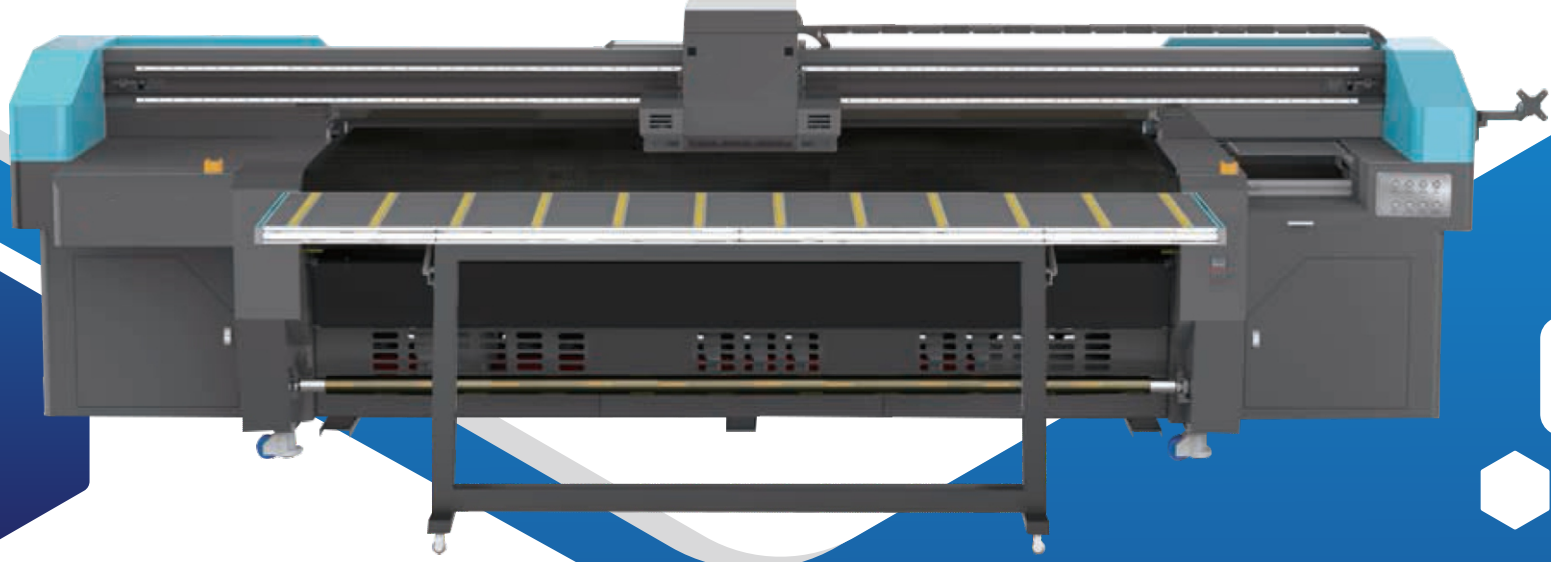


KB-UH3200 SPECIFICATION

- ▶ Full- frame Structure, with multiple printing Zones, The accuracy of the **platform is within 0.3mm** Ensuring High-quality Printing after long-distance transportation
- ▶ Rich Configuration, Up to 24 Heads can be installed; Any Combination of **4 Color, 6 Colors, Color white Color, Color white Varnish** and other Printing Mode
- ▶ With **Kyocera Print Head**, the Accuracy is Up to **3600dpi**, With **Ricoh Print Head**, the Resolution is Up to 2400dpi.
- ▶ The Automatic Media Height Measurement and Positioning System of the Front Carriage can help you Quick Complete The Printing and Improve Efficiency
- ▶ It is Equipped with Standard Automatic Guide belt deviation Correction Function, Which Effectively Guarantees the Stability of the Guide belt Operation
- ▶ Ink Shortage alarm, Dual Negative Pressure Control to Ensure Continuous and Stable Ink Supply
- ▶ Environmental Protection: The Ink Does not Contain VOC (Volatile Organic Gases)
- ▶ Up to 12 Ricoh Printhead can be installed


KB-UH3200

KB-UH3200 Heavy-Duty Industrial Machine / Production Level / With 24 High-Speed Konica 1024i, Mass Production Speed 180sqm/h

Head Configuration



Four rows of four colors (Full color mode)




Four rows of seven colors (color and white mode)

Application



Acrylic

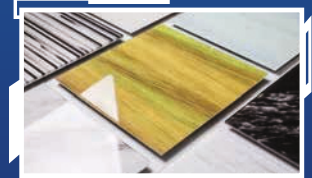

Glass



Light box



Soft film

ACCESSORY DETAILS



井-shaped integrated frame



Electronic sub-tank system




Automatic head height measurement system



Automatic guide belt deviation correction system




Konica printing



High-precision printing platform



Special material flattening system

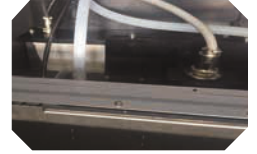

Static eliminator

TECHNICAL PARAMETER

PRINTHEAD	Konica / Ricoh G6			
PRINTING RESOLUTION	600dpi / 900dpi / 1200dpi / 1800dpi / 2400dpi / 3600dpi			
COLOUR MODE	Four Colours / Six Colours / White / Varnish Optional			
MATERIAL THICKNESSES	0-70mm			
CURING SYSTEM	LED Lamp Curing			
SUCTION PLATFORM	Partition Suction, Adapts to Various Materials			
PRINT SIZE	Maximum width 3200mm			
INK	Environmental Protection UV Ink			
INK TANK CAPACITY	2000ml Volume Ink Automatic Ink Shortage Alarm and Ink Supply System			
INK SUPPLY SYSTEM	Automatic Negative Pressure Ink Supply System			
PRINT MATERIAL	Glass, Soffilm, Acrylic, Chevron Board, Light Box Cloth, Banner, etc...			
OPERATING SYSTEM	Windows 10, Windows 7 64bit RAM ≥8G			
PRINTING SPEED	24 Konica Heads	Draft Mode	Production Mode	High Precision Mode
		240 sqm/h	180 sqm/h	130 sqm/h
	12 Ricoh G6 Heads	Draft Mode	Production Mode	High Precision Mode
		168 sqm/h	129 sqm/h	87 sqm/h
RIP SOFTWARE	Photoprint / Print Factory, Onyx Optional			
WORKING ENVIRONMENT	Temperature: 15°C~30°C			
	Humidity			
POWER SUPPLY	Maximum Power: 8KW; AC:220V(±10%) >LSA, 50~60Hz			
FILE FORMAT	TIFF, JPEG, EPS, PDF, PSD			
DIMENSIONS	5730 x 1860 x 1670mm			
TOTAL WEIGHT	3100Kg			



LIPI MARKETING PVT. LTD

No: 28, 3rd Cross St, Venkateswara Colony, Nehru Nagar,
OMR Kottivakkam, Chennai - 600041

+91 94443 95467 | +91 94443 95477

sales@lipimarketing.com

www.lipimarketing.com